

Key Features

- Tanalised timber
- Tested to BS EN 1793
- Trusted Linnell Bros quality with 10-15-year service life
- Design Level Difference (DLR) of 26dB
- Available in green or brown



and industrial applications.


The Noise Reflect acoustic fencing system from Linnells achieves a certified Design Level Difference of 26 dB, tested in accordance with BS EN 1793-2 and conforming to BS EN ISO 10140-2:2021. Panels are designed to limit the transmission of traffic and environmental noise, providing effective attenuation across the relevant frequency range for roadside, rail,

Panels are engineered to form a continuous acoustic barrier, with close-fitting joints to minimise sound leakage and maintain consistent performance.


Available in heights from 1.8m to 4.8m, each fence is cut to size to suit individual project requirements. All fencing is processed at our on-site mill, supplied either as kits or prefabricated for efficient installation. Depending on fence height, post centres are 1.8m or 2.4m.

For further information about Noise Reflect, give our team a call on 01327 354422, email info@linnellbros.co.uk or visit us in store.


Front View

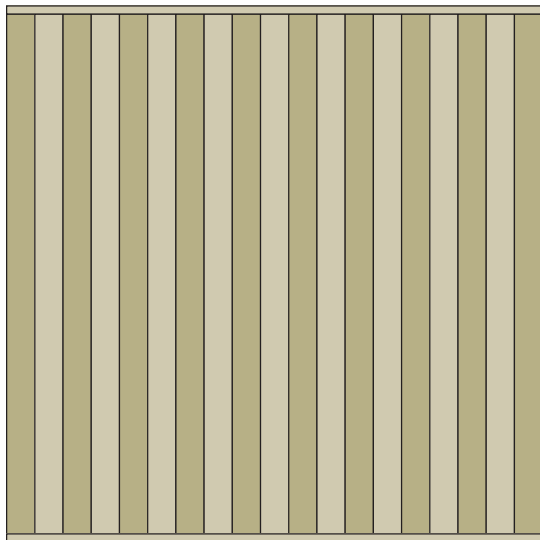


Plan View
(Capping omitted)

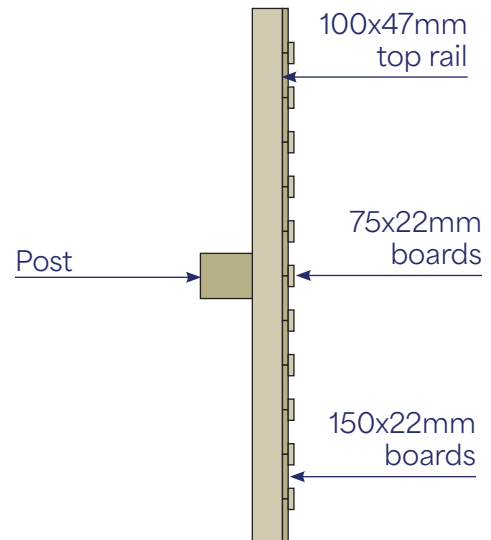

Rear View

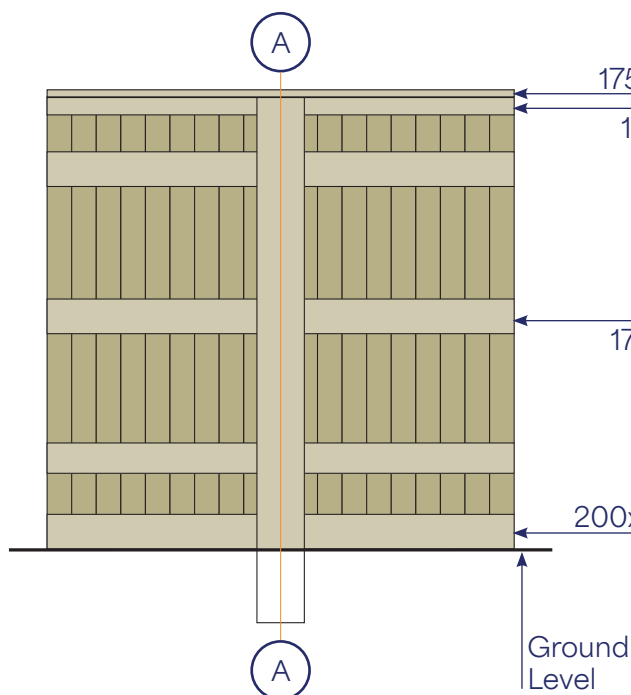

Section A-A

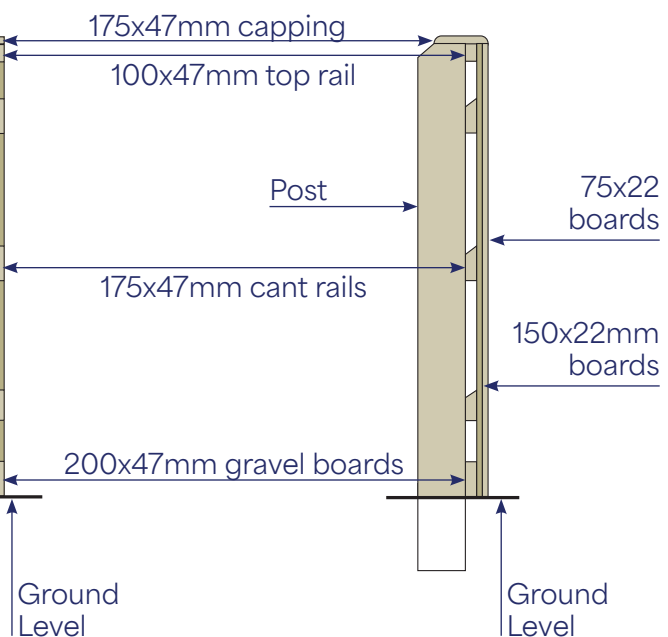

BS ENB 1793-2: 2018

Acoustics - Road Traffic Noise Reducing Devices

Test method for determining the acoustic performance

Source Room

Volume	136m ³
Temperature	19.8°C
Relative Humidity	58.1%

Receiving Room

Volume	222m ³
Temperature	19.8°C
Relative Humidity	58.1%

Average density: 25.6kg/m³

Frequency (Hz)	R (dB)
100	18.7
125	20.7
160	21.0
200	21.1
250	22.8
315	24.2
400	25.5
500	26.9
630	27.5
800	28.3
1000	28.8
1250	28.9
1600	28.8
2000	26.8
2500	24.5
3150	26.2
4000	27.2
5000	25.9

RATING ACCORDING TO BS EN 1793-3: 1998

$DL_R = 26\text{dB}$

